

600V Overhead Cable



Construction : The aluminium conductor is insulated with XLPE. One to three insulated conductors are cabled together with a same size ACSR.



Application: This product is suitable for use in overhead transmission and distribution system at 600V or less.




Operating Temperature: Max permissible continuous operating temperature of conductor shall not exceed 90°C.



Standard: ICEA S-76-474, ASTM B230, ASTM B231, ASTM B232 or other standards required by customers.



Packing: Coil, steel/wooden reel, wooden reel or steel reel.

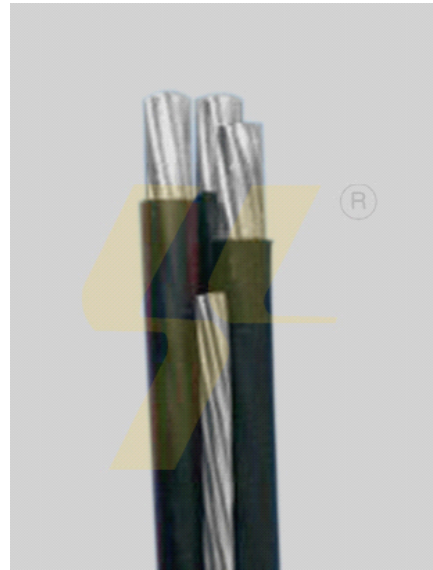

600V Overhead Cable

Code Word	Size AWG or MCM	Approx. Overall Diameter (mm)	Code Word	Size AWG or MCM	Approx. Overall Diameter (mm)
SHEPHERD	1*6+6	12.12	TRITON	2*2/0+2/0	28.03
TERRIER	1*4+4	14.64	MURSIA	2*3/0+3/0	30.90
VOLUTA	2*6+6	13.79	CERAPUS	2*4/0+2/0	31.98
STROMBUS	2*4+6	15.51	ZUZARA	2*4/0+4/0	34.11
PERIWINKLE	2*4+4	16.46	LIMPET	2*336.4+336.4	42.85
COCKLE	2*2+4	18.65	CHOLA	3*6+6	15.86
CONCH	2*2+2	19.84	HACKNEY	3*4+4	18.83
NERITINA	2*1/0+1/0	25.30	PALOMINO	3*2+2	22.60
JANTHINA	2*1/0+2	23.79	COSTENA	3*1/0+1/0	29.00
CENIA	2*1/0+1/0	25.42	GRULLO	3*2/0+2/0	31.92
RANELLA	2*1/0+2	23.92	APPALOOSA	3*4/0+4/0	38.69
CAVOLINIA	2*2/0+1	26.14	BRONCO	3*336.4+336.4	48.79
RUNCINA	2*2/0+2/0	27.82	HURRICANE	3*500+336.4	57.61